


DISTRIBUZIONE E CONFEZIONAMENTO BURRO

BUTTER DISTRIBUTION AND PACKAGING

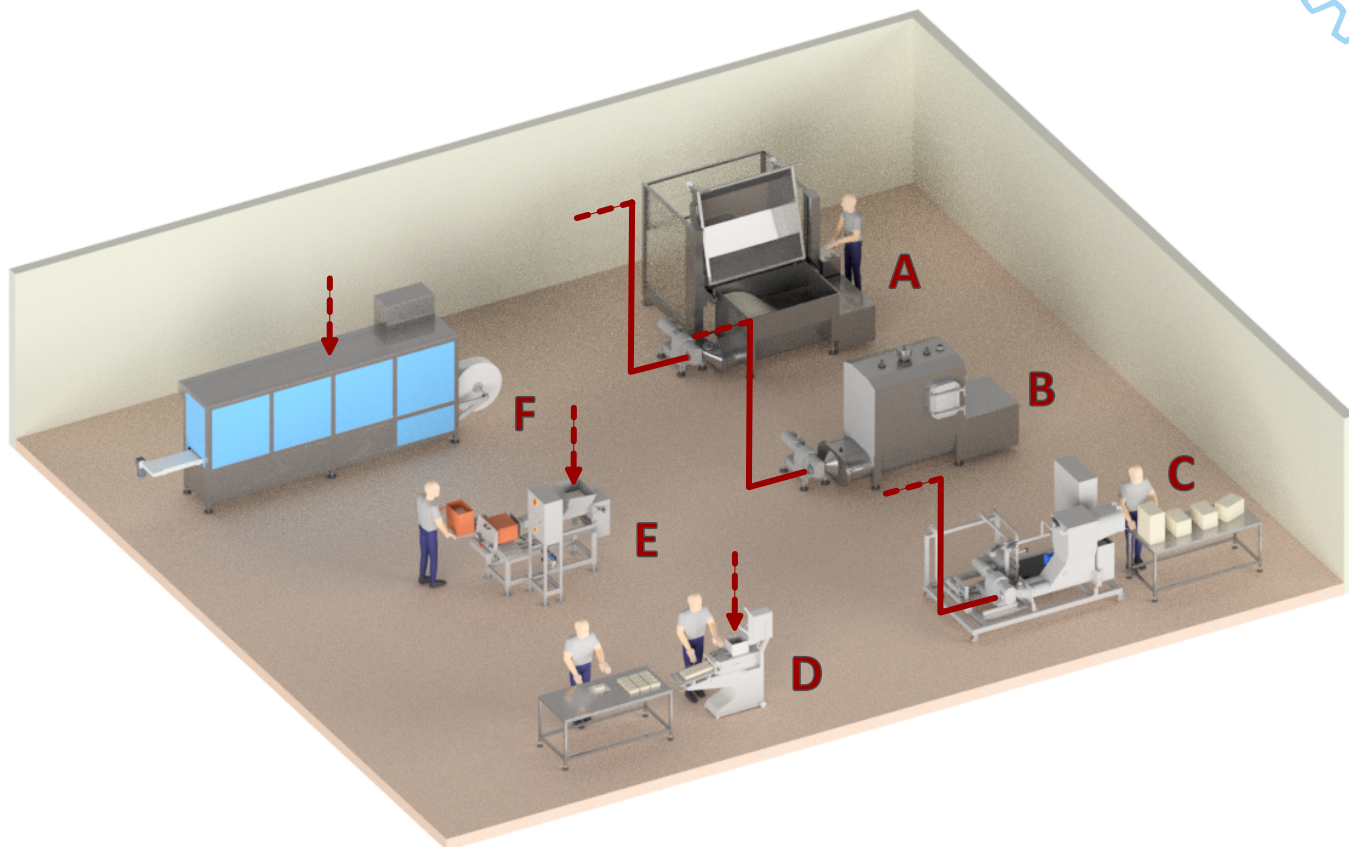

A. SILO APERTI PER BURRO Mod. SBA

Dotati di coperchio apribile per consentire il carico del burro da carrelli tramite sollevatori-ribaltatori, funzionano da polmone tra le zangole impastatrici e le linee di formatura e confezionamento.

B. SILO PER BURRO Mod. SB

Impiegati come serbatoi di accumulo per il burro proveniente dalle burrificatrici continue o da impianti di reworking, tramite pompe volumetriche a lobi distribuiscono il prodotto alle linee di formatura e confezionamento.

C. ALIMENTATORI Mod. AM

Per l'alimentazione del burro a confezionatrici manuali o automatiche. Sono completi di sistemi per il reworking di blocchi e panoni.

D. PANETTATRICI SEMIAUTOMATICHE Mod.PPB

Per la formatura del burro in panetti o lastre con forma e grammatura a scelta fino a 1000 grammi.

E. RIEMPITRICI CARTONI Mod. PPB

Per il confezionamento semiautomatico del burro in scatole di cartone preformate e rivestite con peso da 5 a 25 kg.

F. CONFEZIONATRICI FORM-FILL-SEAL Mod. TFL

Termoformatrici realizzate per il confezionamento del burro in vaschette formato hotel del peso di 8 - 10 grammi.

A. BUTTER SILOS WITH COVER Mod. SBA

Equipped with an opening lid to allow butter to be loaded from containers using tilting-lifters, they function as a buffer between churns and forming and packaging lines.

B. BUTTER SILOS Mod. SB

Used as storage tanks for butter coming from continuous butter making machines or reworking plants, they distribute the product to forming and packaging lines via positive displacement lobe pumps.

C. FEEDING UNITS Mod. AM

For feeding butter to manual or automatic packaging machines. They are complete with reworking systems for blocks.

D. BUTTER FORMING MACHINES Mod.PPB

For forming butter into bricks or sheets with shape and weight on request up to 1000 grams.

E. BULK BUTTER FILLING MACHINES Mod. PPC

For the semi-automatic packaging of butter in pre-formed and coated cardboard boxes weighing from 5 to 25 kg.

F. FORM-FILL-SEAL PACKAGING MACHINES Mod. TFL

Thermoforming machines designed to pack butter in hotel-sized cups weighing 8 - 10 grams.



DISTRIBUZIONE E CONFEZIONAMENTO BURRO

BUTTER DISTRIBUTION AND PACKAGING


SILO PER BURRO APERTO • BUTTER SILO WITH COVER



MODELLO	MODEL	from SBA/750	to SBA/1200
Dimensioni (AxBxC)	Dimensions(AxBxC)	2350x1000x1050h mm	2600x1000x1200h mm
Diametro coclee (D)	Augers diameter (D)	250 mm	250 mm
Capacità vasca	Vat capacity	750 l	1200 l
Capacità lavorativa	Working capacity	250 kg	500 kg
Potenza installata	Installed power	2,2 kW	3 kW
Peso	Weight	500 kg	700 kg

SILO PER BURRO • BUTTER SILO

MODELLO	MODEL	from SB/1000	to SB/4000
Dimensioni (AxBxC)	Dimensions(AxBxC)	2350x1000x1050h mm	2600x1000x1200h mm
Diametro coclee (D)	Augers diameter (D)	300 mm	500 mm
Capacità vasca	Vat capacity	1000 l	4000 l
Capacità lavorativa	Working capacity	600 kg	2700 kg
Potenza installata	Installed power	3 kW	8 kW
Peso	Weight	600 kg	2900 kg

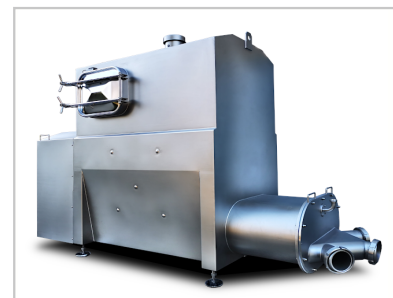

ALIMENTATORE • FEEDING UNIT



MODELLO	MODEL	from AM/150
Dimensioni (AxBxC)	Dimensions(AxBxC)	1400x640x1680h mm
Altezza di carico (D)	Feeding Height (D)	1000 mm
Capacità tramoggia	Vat capacity	150 l
Produzione	Production	up to 1000 kg/h
Potenza installata	Installed power	4,5 kW
Peso	Weight	250 kg



DISTRIBUZIONE E CONFEZIONAMENTO BURRO

BUTTER DISTRIBUTION AND PACKAGING


PANETTATRICE SEMIAUTOMATICA • BUTTER FORMING MACHINE



MODELLO	MODEL	from SBA/750	to SBA/1200
Dimensioni (AxBxC)	Dimensions(AxBxC)	2350x1000x1050h mm	2600x1000x1200h mm
Diametro coclee (D)	Augers diameter (D)	250 mm	250 mm
Capacità vasca	Vat capacity	750 l	1200 l
Capacità lavorativa	Working capacity	250 kg	500 kg
Potenza installata	Installed power	2,2 kW	3 kW
Peso	Weight	500 kg	700 kg

RIEMPITRICE CARTONI • BULK BUTTER FILLING MACHINE

MODELLO	MODEL	from SB/1000	to SB/4000
Dimensioni (AxBxC)	Dimensions(AxBxC)	2350x1000x1050h mm	2600x1000x1200h mm
Diametro coclee (D)	Augers diameter (D)	300 mm	500 mm
Capacità vasca	Vat capacity	1000 l	4000 l
Capacità lavorativa	Working capacity	600 kg	2700 kg
Potenza installata	Installed power	3 kW	8 kW
Peso	Weight	600 kg	2900 kg

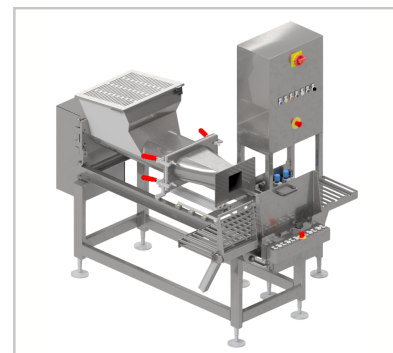

CONFEZIONATRICE FORM-FILL-SEAL • FORM-SILL-SEAL PACKAGING MACHINE



MODELLO	MODEL	TFL 6
Dimensioni (AxBxC)	Dimensions(AxBxC)	1400x640x1680h mm
Altezza di carico (D)	Feeding Height (D)	1000 mm
Capacità tramoggia	Vat capacity	150 l
Produzione	Production	up to 1000 kg/h
Potenza installata	Installed power	4,5 kW
Peso	Weight	250 kg

